

Model 200-E3 Spider




K e g i o m
l i f t i n g




gru . crane . kran . grue . grúa . guindaste

Tabella portata (stabilizzatori tutti estesi) - Lifting Capacity Chart (outriggers fully extended) - Tableau de Charge (stabilisateurs étendus max.)
 Hublasttabelle (Abstützung ganz ausgefahren) - Tablero de Carga (estabilizadores a la máxima extensión)

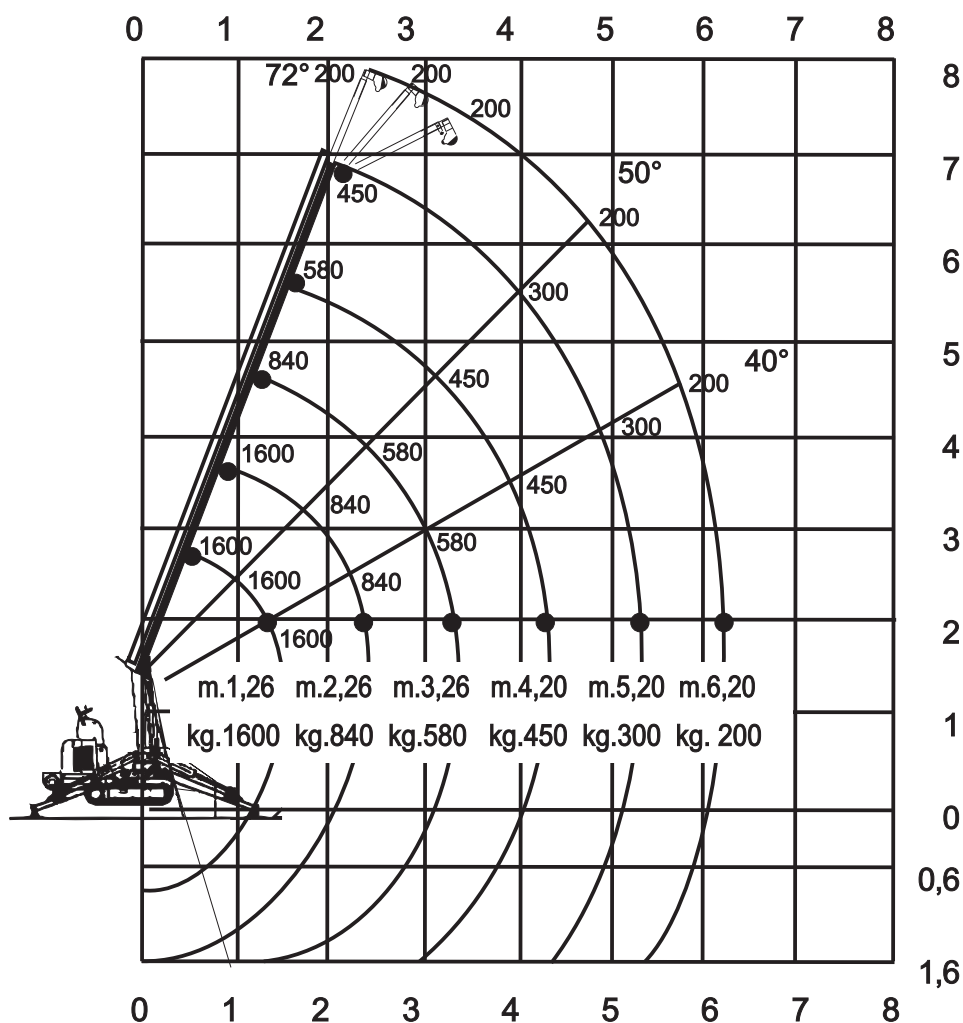

Dimensioni Generali - General Dimensions - Dimensions Générales - Gesamtmaße - Dimensiones Generales

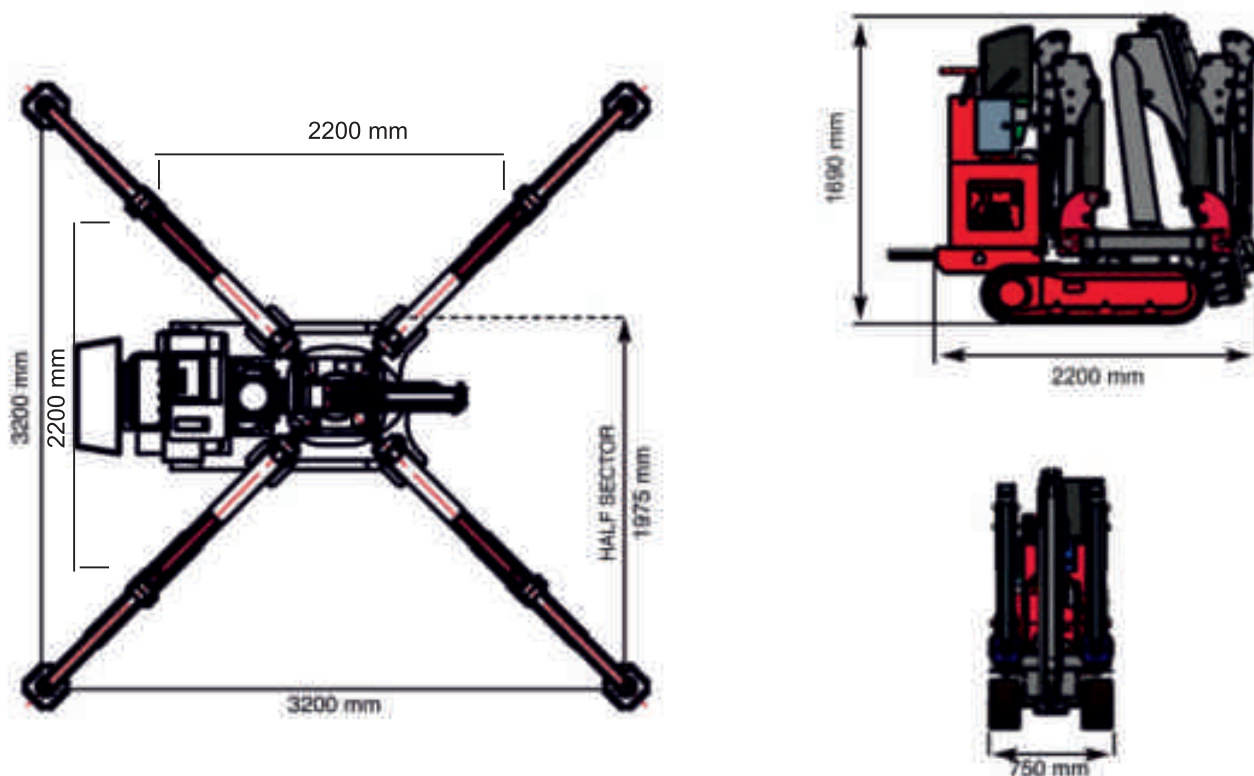

						
	Motore benzina avviamento elettr.	Motor petrol electric starting	Benzinmotor Elektrostarter	Moteur à essence démarrage électr.	Motor gasolina arranque electr.	Honda GX 390-13HP a 3500 rpm
	Capacità serbatoio	Tank capacity	Tankkapazität	Capacité réservoir	Capacidad tanque	6 l.
	Trazione idrostatica	Drive system hydrostatics	Hydrostatischer Antrieb	Transmission hydrostatique	Tracción hidroestática	Km/h 1.7-2.5
	Angolo di rampa	Ramp angle	Steigungswinkel	Rampe admissible	Rincón de tramo	20° (36%)
	Cingoli in gomma	Tracks in rubber	Raupenketten aus Gummi	Chenilles en caoutchouc	Orugas de goma	1165 x 180 x 20 mm.
	Portata max	Max lifting	Max.Tragfähigkeit	Capacité maximum	Carga máxima	1500 Kg.
	Sbraccio massimo	Max working radius	Max.Ausladung	Longueur de flèche max	Alcance lateral máx.	6,20 m.
	Altezza massima	Max.working height	Tragfähigkeit bei max.Ausladung	Hauteur de levage max.	Altura max. de trabajo	8,00 m.
	Fune	Winch rope	Seil	Câble	Cable	30 m. ø 8 mm.
	Rotazione	Rotation	Umdrehung	Rotation	Rotación	360°
	Stabilizzatori	Outriggers	Abstützung	Stabilisateurs	Estabilizadores	Hydraulic
	Pressione al suolo	Max track loading	Bodendruck	Pression au sol	Presión de apoyo	0,26 Kg/cm²
	Comandi elettrico proporzionali	Electricals proportionals control	Elektrische proportionale Steuerung	Commandes électriques proportionnelles	Mandos eléctricos proporcionales	
	Limitatore di momento	Automatic limiting device	Automatische Grenzlastregelung	Limiteur de charge	Limitador de momento	Elettronico - Electronic Elektronisch - Électronique Electrónico
	Pressione max	Max pressure	Max Betriebsdruck	Pression max	Max presión	180 bar
	Dimensioni Gru	Dimensions crane	Abmessungen Kran	Dimensions de la grue	Dimensiones grúa	1700 x 750 x 1620 mm. without optionals
	Peso	Weight	Gewicht	Poids	Peso	1000 Kg.without optionals

OPTIONALS

	Verricello Winch Treuil Seilwinde Cabrestante
	Elettropompa 115-220-380 V Electric pump 115-220-380 V Pompe électrique 115-220-380 V Elektrische pumpe 115-220-380 V Bomba eléctrica 115-220-380 V
	Radiocomando Radio remote control Radiocommande Funkfernsteuerung Radiocomando
	Cestello Basket Nacelle Personenkorb Cesta

	Prolunghe meccaniche Manuals extensions Rallonges manuelles Manuelle verlängerung Alargadores mecánicos
	Allargamento idraulico cingoli mm. 750/1050 Widening hydraulic tracks mm. 750/1050 Élargissement hydraulique des chenilles mm. 750/1050 Hydraulisch ausfahbare raupenketten mm. 750/1050 Ensanche hidráulicos orugas mm. 750/1050
	Sollevatore a ventosa portata max +0 400 - 1200 Kg Vacuum lifter max lifting +0 400 - 1200 Kg élevateur à vide carga maxima +0 400 - 1200 Kg levantador de vacío capacidad max +0 400 - 1200 Kg Vakuumheber max Tragfähigkeit +0 400 - 1200 Kg



Dealer



Kegiom Lifting S.r.l. - Via Duchessa di Galliera, 12
15076 Ovada (AL) - Italy
Tel./Fax (+39) 0143 822031 - 46541
e-mail: info@kegiom.com - web: www.kegiom.com
C.F. e P. Iva 01956070062 - C.C.I.A.A. Alessandria n. 213887

